

04-13-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

04/12/00
jc772 U.S. PTO

Re Application of Jeff Wasilko

Serial No.: Not yet assigned

Group Art Unit:

Filed: Herewith

Examiner:

jc682 U.S. PTO
09/548308

04/12/00

For: ATTENUATION, DELAY, QUEUING, AND MESSAGE CACHEING PROCESSES
FOR USE IN E-MAIL PROTOCOLS IN ORDER TO REDUCE NETWORK SERVER
LOADING

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231


Dear Sir:

Enclosed please find the following:

1. Specification, abstract and claims (3 independent, 23 dependent, 26 total) (29 pages);
2. Informal drawings (8 figures, 6 sheets);
3. Declaration and Power of Attorney;
4. Assignment with Recordation Sheet;
5. One check in the amount of \$838.00 (\$690.00 for filing the application, \$40.00 for filing the assignment, and \$108.00 for filing excess claims); and,
6. Certificate of Express mailing.

The Commissioner is hereby authorized to charge any fee deficiency, or credit any overpayment, to Deposit Account No. 18-1579. The Commissioner is also authorized to charge Deposit Account No. 18-1579 for any future fees connected in any way to this application. Two copies of this letter are enclosed.

Respectfully submitted,

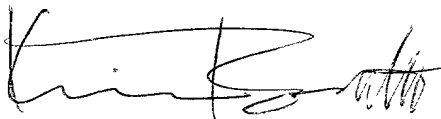

Kevin L. Pontius
Registration No. 37,512
Roberts Abokhair & Mardula, LLC
11800 Sunrise Valley Drive, Suite 1000
Reston, VA 20191-5302
(703) 391-2900

April 12, 2000

Atty. Docket No. 2585-003


09548308-04/12/00

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label Number EL528296366US

Date of Deposit: April 12, 2000

I hereby certify that the patent application of Jeff Wasilko for an **ATTENUATION, DELAY, QUEUING, AND MESSAGE CACHEING PROCESSES FOR USE IN E-MAIL PROTOCOLS IN ORDER TO REDUCE NETWORK SERVER LOADING** including the specification, abstract, and claims (3 independent, 23 dependent, 26 total)(29 pages); informal drawings (8 figures, 6 sheets); declaration and power of attorney; an assignment together with a recordation cover sheet; and a check in the amount of \$838.00 (\$690.00 for filing the application, \$40.00 for filing the assignment, and \$108.00 for filing excess claims), are being deposited with the United States Postal Service for "Express Mail" service under 37 C.F.R. § 1.10 on the date indicated above and are addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

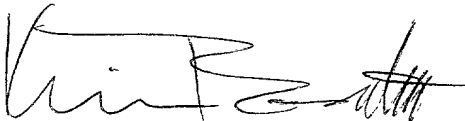

Kevin L. Pontius
Registration No. 37,512
Roberts Abokhair & Mardula, LLC
11800 Sunrise Valley Drive, Suite 1000
Reston, VA 20191-5302
(703) 391-2900

April 12, 2000

Atty. Docket No. 2585-003

1 Title: **ATTENUATION, DELAY, QUEUING, AND MESSAGE CACHEING**
2 **PROCESSES FOR USE IN E-MAIL PROTOCOLS IN ORDER TO**
3 **REDUCE NETWORK SERVER LOADING**

4 Inventor: **Jeff Wasilko**
5

6 **RELATED APPLICATION**

7 This application is related to the commonly-assigned, co-pending patent
8 application of Howard Pfeffer and John Leddy entitled Reduction of Network Server
9 Loading, filed March 23, 2000, which has been assigned serial no. 09/533,463, and which
10 is incorporated herein by reference in its entirety for all purposes.

11 **BACKGROUND OF THE INVENTION**

12 **1. Field of the Invention**

13 The present invention relates generally to the field of data networks. More
14 particularly, the present invention relates to reduction of traffic handling load on network
15 servers by decentralization of mail handling protocols.

16 **2. Background Information**

17 Over the last twenty years, the demand for data network services has grown
18 rapidly. Many large networks have been built by a number of providers to meet the
19 voracious demand for bandwidth to handle data traffic.

20 Data networks are commonly used for *inter alia* transmission of electronic mail
21 messages (hereinafter e-mail). According to Post Office Protocol (hereinafter POP)
22 standard for e-mail handling, transmitted e-mail messages are routed to a centralized mail
23 server facility. Those e-mail messages are warehoused at the centralized mail server until
24 retrieved by their intended recipients. A user retrieves their e-mail messages from the mail

1 server by sending an inquiry message via the network to the mail server asking if there is
2 any mail stored there for them. Commonly these inquiry messages sent to the mail server
3 are known as "POP checks" because they check for mail according to the Post Office
4 Protocol. If the user's mail box is empty, then the mail server sends a negative response to
5 the user telling him so. On the other hand, if the mail server is storing mail messages for
6 the user, those messages are transmitted (in response to the POP check) to the user via the
7 network.

8 One problem with large data networks where the clients are connected at all times
9 without having to create a dial up connection is the large amount of network traffic due to
10 frequent POP checks that users make (or, more typically, that the users' computers makes
11 on the users' behalf) to see if there are any new e-mail messages waiting for them on the
12 mail server. The use of a POP3 mail system in a wide area network (WAN) may result in
13 a large amount of network traffic. This is not only a bandwidth problem, but also causes a
14 substantial loading on the servers across the network that have to handle and route all this
15 largely unproductive traffic. When a mail server is remote from the mail client, each
16 POP3 request may require numerous hops to transverse the network, and response must
17 travel the same distance.

18 It is largely unproductive traffic because the vast bulk of POP checks (over 90%,
19 typically) result in negative responses because POP checks are generated much more
20 frequently than the frequency with which e-mail messages arrive at the mail server. This
21 is very inefficient. Significant traffic handling server load reduction, and some bandwidth
22 savings, can be made if most POP checks are terminated close in the network to the
23 sender.

1 Thus, what is needed is a scheme for reducing the number of POP checks that are
2 transmitted over the network to the mail server.

3 Another e-mail related problem in networks is that the bandwidth demand resulting
4 from e-mail traffic is concentrated during certain times of the day. In particular, the
5 morning hours are a concentrated time for retrieval of e-mail messages from the mail
6 server. These e-mail-generated spikes in bandwidth demand present network management
7 challenges. One typical solution is to increase bandwidth capacity of the network to
8 accommodate demand spikes completely. Obviously, this is an expensive and inefficient
9 option because the added capacity will go largely unused (except in the event of demand
10 spikes). Another typical solution is to simply permit poor network performance during
11 periods when bandwidth demand spikes. Obviously, this option would be a source of
12 irritation to the users of the network.

13 Thus, what is needed is a scheme to accommodate e-mail retrieval traffic without
14 adding capacity that will go largely unused and without reducing network performance.

15 **SUMMARY OF THE INVENTION**

16 It is an object of the present invention to a scheme for reducing the number of POP
17 checks that are transmitted over the network to a POP mail server.

18 It is another object of the present invention to scheme to accommodate e-mail
19 retrieval traffic without adding capacity that will go largely unused and without reducing
20 network performance.

21 It is yet another object of the present invention to efficiently distribute e-mail
22 handled according to a POP system.

23 It is still another object of the present invention to push bandwidth demand and
24 traffic handling load toward the edges of a wide area network.

1 The present invention addresses this problem with three approaches that may be
2 used separately or together. The first is to attenuate the POP checks. The second is to
3 delay the POP checks. The third is to cache the e-mail messages.

4 Attenuation of POP checks is accomplished by intercepting each POP check packet
5 at a proxy server that is nominally local to where the user is located. The proxy server lets
6 the user's first POP check proceed on through the network to the mail server. Thereafter,
7 though, the proxy server only permits that user's received POP checks to proceed onward
8 according to a predetermined algorithm. For example, the proxy server may only permit a
9 POP check to proceed to the mail server if it has been at least fifteen minutes since the last
10 time the mail server was actually checked for e-mail by that particular user. When overly
11 frequent POP checks by that user are received prior to the permitted time, no actual check
12 of the mail server is permitted and the proxy server simply informs the user that he has no
13 mail (despite not knowing deterministically whether that is a true statement).

14 As with attenuation, delay of POP checks is accomplished by intercepting each
15 POP check packet at a proxy server that is nominally local to where the user is located.
16 Although an initial POP check is permitted to proceed on through the network to the mail
17 server, if the frequency of subsequent POP checks is greater than a threshold, they are
18 placed in a delay queue and processed with a delay inserted into the signaling. This delay
19 can be a fixed value or a variable that changes with client POP habits. This delay can be
20 inserted for a single POP command or for multiple of the POP session commands
21 depending on the total amount of delay desired. The effect of this delay is to increase the
22 time that it takes for a POP session to complete. An advantage of this technique is that the
23 state of the mailbox is accurately and deterministically reported.

1 According to the cache aspect of the invention, a user's e-mail is cached at the
2 proxy server nearest to his presumed location. This decentralizes the e-mail storage away
3 from the mail server and spreads it out over the network at the various proxy servers. This
4 cache action is preferably done when there is a lull in network traffic (e.g., at night). This
5 can also be done as soon as mail is available so that the proxy deterministically knows that
6 a client has unread mail. This also has the effect of decentralizing the bandwidth demand
7 on the overall network since the e-mail messages have a shorter distance to travel when
8 retrieved by the user from the cache location at the proxy server.

9 BRIEF DESCRIPTION OF THE DRAWINGS

10 Additional objects and advantages of the present invention will be apparent in the
11 following detailed description read in conjunction with the accompanying drawing figures.

12 **Fig. 1** illustrates a network diagram implementing proxy handling of e-mail
13 according to an embodiment of the present invention.

14 **Fig. 2** illustrates a logical implementation for a subset of the signaling transactions
15 that take place between a client, a proxy server, and a mail server according to an
16 embodiment of the present invention.

17 **Fig. 3** illustrates a logical implementation for another subset of the signaling
18 transactions that take place between a client, a proxy server, and a mail server according to
19 an embodiment of the present invention.

20 **Fig. 4** illustrates a logical implementation for a subset of the signaling transactions
21 that take place between a client, a proxy server, and a mail server according to an alternate
22 embodiment of the present invention.

1 based on its most recent knowledge of the state of the requestor's actual mailbox. The
2 proxy server uses an "attenuation interval" of n minutes. Thus, every n minutes it will
3 allow a mail query session (i.e., POP check) to flow through to the actual mail server. If
4 the mailbox is empty after this session, the proxy server will note that, and will return
5 "mailbox empty" responses to all POP checks for that mailbox for the next n minutes,
6 after which it will permit the subsequent POP check packet to flow through for that
7 mailbox, and so continue the pattern.

8 Generally speaking, the proxy server permits a user's first POP check to proceed
9 on through the network to the mail server. Thereafter, though, the proxy server only
10 permits that user's received POP checks to proceed onward according to a predetermined
11 algorithm. For example, the proxy server may only permit a POP check to proceed to the
12 mail server if it has been at least fifteen minutes since the last time the mail server was
13 actually checked for e-mail by that particular user. When overly frequent POP checks by
14 that user are received prior to the permitted time, no actual check of the mail server is
15 permitted and the proxy server simply informs the user that he has no mail (despite not
16 knowing deterministically whether that is a true statement).

17 While it is a worthy object to moderate the amount of traffic handling that is
18 required by the servers in a network, the attenuation solution should be implemented with
19 respect for the concerns of the e-mail users. Under certain circumstances, an e-mail user
20 may observe that the attenuation algorithm as described above may cause some delay in
21 how quickly they receive their e-mail messages. The user may perceive this not as an
22 optimization but, rather, as poor service. Accordingly, there is a need to accommodate the
23 expectations of the e-mail users to the extent possible.

1 One simple way to avoid user perception of delay service of e-mail messages is to
2 set the interval of n minutes at which POP check flow through is permitted as low as
3 possible. In fact, the value of n can be set dynamically, based on overall network load, so
4 that it is low when network load is light and set higher when network load peaks.

5 An optional feature of this attenuation process is that a custom SMTP extension
6 may provide an event service whereby the proxy server can receive notification when new
7 mail arrives for any mail account on the mail server for which it is acting as an attenuation
8 proxy. In case of such an event notification, it will permit the subsequent POP check
9 packet to flow through for that mailbox.

10 Another optional algorithm is to permit POP checks to flow through based upon
11 the number of POP checks that have been received for a given e-mail account. In other
12 words, only one out of every m POP checks is permitted to flow through to the mail
13 server. For obvious reasons, this is not a preferred method. It is mentioned simply
14 because of the ease with which it could be implemented.

15 Another way to manage user expectations is to tell a user that his e-mail service is
16 being attenuated. This is implemented by causing the proxy server to automatically send
17 an e-mail message to affected users on a regular basis (e.g., once a day, or any other
18 choice of programmable period). The contents of the e-mail communicate to the user that
19 their frequent POP checks are placing unproductive load on the system and that the
20 excessive checks will be attenuated. Preferably, message also notifies the recipient that as
21 they reduce the frequency of their POP checks they will no longer be attenuated and
22 directs them to a web page with details on how to set the frequency in their e-mail client
23 software. Additionally, instructions on how to modify email client preferences or a
24 reference to other documentation such as a user guide may be contained in the notification

1 email. The reference to other documentation is preferably embodied as a link to a web
2 page that provides relevant instructions.

3 The preferred attenuation algorithm is a combination of a time-based rule (i.e., wait
4 n minutes before letting another POP check through) and a demand-based rule (i.e., let the
5 next POP check through only if notice of actual mail receipt has been received from the
6 mail server). Although the demand-based rule alone may appear to be adequate, the
7 combination with a time-based rule ensures that e-mail still gets checked in the event that
8 the notification message from the mail server is not sent or fails to be routed to the proxy
9 server. The redundant use of the two rules provides a more robust system, and minimizes
10 the chances of causing user dissatisfaction with e-mail service.

11 The attenuation aspect of the present invention preferably makes a deterministic
12 assessment of whether an e-mail account being attenuated actually has any new e-mail
13 messages to be retrieved. One method is for the proxy server to snoop the actions of the
14 POP protocol and keep track of how many messages are read from the mail server and
15 how many were deleted from the mail server.

16 A simpler method to accomplish this is to wait until the e-mail client ends the e-
17 mail session. This happens when the e-mail client transmits a "quit" message. Rather
18 than letting the quit message flow through immediately, the proxy server temporarily
19 retains the quit message while it determines the status of that e-mail account. While the
20 quit command is being held, the proxy server sends a "stat" command to the mail server
21 asking, in essence, "Do you have mail for me?" If the answer received from the mail
22 server is "no," then the proxy server knows deterministically that the e-mail client has no
23 un-retrieved messages. This status is cached locally at the proxy server. Subsequently,
24 the quit message is permitted to travel onward through the network to the mail server.

1 One algorithm for implementing the attenuation aspect of the present invention
2 uses a set of tables. When a new user checks their e-mail account on the mail server (i.e.,
3 sends an initial POP check), the proxy server places that user in an attenuation table.
4 Assuming that the state of the user's mailbox is determined, a timer is started when the
5 user is placed in the table. The user remains in the table until the timer times out. Each
6 time the user transmits a POP check, their POP check is attenuated at the proxy server if
7 the user still remains listed in the table. In other words, until the timer times out and
8 removes the user from the attenuation table, that user's mail client software will continue
9 to receive pseudo responses to its POP checks telling the user that the mail server has no
10 mail for that account.

11 Another triggering event for removing the user from the attenuation table is if a
12 notification message is received from the e-mail server that the user has mail. By being
13 removed from the table, the user's next POP check is passed through to the mail server.

14 Every time the user is removed from the attenuation table (for whatever reason:
15 time out, notification, server reset, etc.) that user's next POP check is permitted to flow
16 through to the mail server. Concurrently, the transmission of that POP check places the
17 user back into the attenuation table and re-starts the timer. In this way, the user's own
18 actions re-establish the state in an attenuation queue.

19 In forming the tables in this implementation, the username information is cached.
20 To avoid the need to perform linear searches, a hash table algorithm is used. Each hash
21 entry in the table is a fixed length value, e.g., a five hash, created according one of plural
22 hash algorithms that are well known in the database art. These hashes are used as keys for
23 entry in a hash table. The first time a POP check is seen from a user, that user's username
24 is hashed and entered as an entry in the hash table. The hash table uses the key-value pair.

1 state in the sequence of commands that make up a POP3 session), lock flag, terminate
2 flag, timeout field, etc.

3 **States, Events, and Actions**

4 What follows is a list of possible states for a POP3 attenuation session, and the
5 actions and state transitions that result from various events, where the main event type is a
6 POP3 command. A session associates a command with a mailbox username/usertable
7 entry; although the POP3 **user** command is the only command that carries that name, an
8 implementation mechanism can make this association for subsequent commands within
9 the session.

10 None State. Event: POP3 proxy server receives the **user** command, but there is no
11 corresponding entry in the user table. The POP3 proxy server creates a table entry for this
12 user, forwards the command to the POP3 mail server, and returns the response to the
13 client. The state transitions to Authorization.

14 Idle State. Event: POP3 proxy server receives the **user** command and finds a
15 corresponding entry in the table. Sends +OK response to the client. The state transitions
16 to Authorization.

17 Authorization State. Event: The POP3 proxy server receives the **pass** command.

- 18 • If the Lock flag equals true, send response: -ERR Your mail box is locked
19 by another POP3 session. The state remains as Authorization.
- 20 • If the password sent equals the password attribute in the user table entry
21 and the time elapsed since the last-time-mailbox-empty time stamp is less
22 than the global attenuation interval, set the terminate flag to true.
23 Additionally, set the Lock flag to true, start the Session Timer to wait for

possible timeout, and send a +OK response to the client. The state transitions to Transaction.

- If the password sent equals the password attribute in the user table entry and the time elapsed is greater than the global attenuation interval, set the Terminate flag to false. Additionally, send the **user** command to the POP3 mail server, wait for a response, send the **pass** command, and wait for a response. Return the response to the client. If the response from the server is –ERR, the state does not change. If the response is +OK, the state transitions to Transaction.
- If the password sent does not equal the password attribute in the user table entry, send the **user** command to the POP3 server, wait for a response, send the **pass** command, and wait for a response. Return the response to client. IF the response from the server is –ERR, the state does not change. If the response is +OK, save the new password; the state transitions to Transaction.

Authorization State. Event: The POP3 proxy server receives the **quit** command. The Lock flag is set to false. The state transitions to idle.

Transaction State. Event: The POP3 proxy server receives any of these commands:

- **stat** -- If the terminate flag equals true, the POP3 proxy server returns +OK 0 0. This tells the client that their mailbox is empty. If the terminate flag equals false, the POP3 proxy server forwards the request to the POP3 mail server and returns the response to the client. The state remains as Transaction.

- 1 • **list** -- If the terminate flag equals true, the POP3 proxy server returns –ERR

2 no such message. If the terminate flag equals false, the POP3 proxy server

3 forwards the request to the POP3 mail server and returns the response to the

4 client. The state remains as Transaction.
- 5 • **retr** -- If the terminate flag equals true, the POP3 proxy server returns –

6 ERR no such message. If the terminate flag equals false, the POP3 proxy

7 server forwards the request to the POP3 mail server and returns the

8 response to the client. The state remains as Transaction.
- 9 • **dele** -- If the terminate flag equals true, the POP3 proxy server returns –

10 ERR no such message. If the terminate flag equals false, the POP3 proxy

11 server forwards the request to the POP3 mail server and returns the

12 response to the client. The state remains as Transaction.
- 13 • **noop** -- The POP3 proxy server returns +OK. The state remains as

14 Transition.
- 15 • **rset** -- The POP3 proxy server returns +OK. The state remains as

16 Transition.
- 17 • **top** -- If the terminate flag equals true, the POP3 proxy server returns –

18 ERR no such message. If the terminate flag equals false, the POP3 proxy

19 server forwards the request to the POP3 mail server and returns the

20 response to the client. The state remains as Transaction.
- 21 • **uidl** -- If the terminate flag equals true, the POP3 proxy server returns –

22 ERR no such message. If the terminate flag equals false, the POP3 proxy

23 server forwards the request to the POP3 mail server and returns the

24 response to the client. The state remains as Transaction.

- **quit** -- If the terminate flag equals true, the POP3 proxy server returns +OK. The Lock flag is set to false, and the state transitions to Idle. If the terminate flag equals false, the POP3 proxy server sends a stat command to the POP3 mail server, to retrieve the number of messages now in the mailbox. If the number is 0, the program sets the last-time-mailbox-empty time stamp to the current time; else it sets the time stamp to NULL. Then it sends quit to the POP3 mail server, and returns the result to the client. The Lock flag is set to false, and the state transitions to Idle.

Transaction State. Event: The POP3 Attenuation Session Timeout Event. The timer popped for a locally terminated session. The POP3 proxy server ends the session connection. The Lock flag is set to false, and the state transitions to Idle.

Garbage Collection

The proxy server performs a garbage collection function. That is, at configurable intervals, or in case of need, it may delete all inactive entries in its user table. A case of need is defined, for example, as a user table that has become full. Other definitions are possible.

After the garbage collection, the proxy server can rebuild its user table, as new POP checks come in.

Opt Out List

The proxy server may optionally support an Opt Out List. This is simply a list of user mailbox account names that won't be subject to proxy treatment. All POP3 commands for names on this list are passed through to the POP3 mail server.

The Fast Check Case

1 The proxy server may optionally support “fast check” logic to account for a case
2 where a user knows that he has new mail (through some non-POP3 source of knowledge,
3 as for example, when has just sent an e-mail to himself), and where he does rapid and
4 repeated new mail checks within a short interval, to get the mail as soon as possible.

5 The basic function of the “fast check” logic is to keep track of the time of each new
6 mail query of a user. If a certain number, say three checks, came through in a short
7 interval, such as 30 seconds, the third check could be permitted through to the mail server.
8 This would reward the user’s persistence. However, if the user continued to check rapidly
9 after the third (where third is used as one example of a configurable value) check,
10 subsequent checks would be terminated locally until another, longer, interval had expired.
11 This would limit the effect of excessive, automated, or potentially malicious querying.

12 One way to discriminate the difference between fast checks that are the product of
13 persistent manual checking by the user and automated checks where the check interval has
14 been set unreasonably low (e.g., one every five seconds) is to assess the periodicity of the
15 checks. If the time interval T between the quickly repeated checks is metronomically
16 regular, then it is adjudged to be nothing more than automated checking. On the other
17 hand, if the time interval T varies substantially, then it is adjudged to be manual fast
18 checking. Some permissiveness is allowed for rewarding the persistence of a user who is
19 fast checking manually. However, fast automated checks are attenuated ruthlessly.

20 Referring to **Fig. 2**, a logical implementation for a subset of the signaling
21 transactions that take place between a client, a proxy server, and a mail server is
22 illustrated. The signal transactions shown are appropriate for the case where the mail
23 client does not already exist in the table.

USPTO
OFFICE
OF
PATENT
ATTORNEYS
AND
AGENTS

1 Referring to **Fig. 3**, a logical implementation for another subset of the signaling
2 transactions that take place between a client, a proxy server, and a mail server is
3 illustrated. The signal transactions shown represent the case where the mail client is being
4 attenuated (i.e., is in the table).

5 Referring to **Fig. 4**, a logical implementation for yet another subset of the signaling
6 transactions that take place between a client, a proxy server, and a mail server is
7 illustrated, according to an embodiment of the present invention. The signal transaction
8 shown handles the situation where the client has changed their password.

9 Referring to **Fig. 5**, a logical implementation for still another subset of the
10 signaling transactions that take place between a client, a proxy server, and a mail server is
11 illustrated, according to an embodiment of the present invention. The signal transaction
12 shown handles the situation where an erroneous password is used.

13 Referring to **Fig. 6**, a logical implementation for an additional subset of the
14 signaling transactions that take place between a client, a proxy server, and a mail server is
15 illustrated. The signal transaction illustrated implements synchronization for cache in
16 transaction state (wherein messages have been cached).

17 Referring to **Fig. 7**, a logical implementation for a further subset of the signaling
18 transactions that take place between a client, a proxy server, and a mail server according to
19 an embodiment of the present invention. Possible synchronization for cache in transaction
20 state (messages have been cached)

21 Preferably, the present invention is implemented according to soft state principles.
22 Each proxy server should be able to build up its state from the information around it,
23 without need for extensive backing up of previous state information. From an initial state
24 of not knowing anything about user's or their accounts, the proxy server gradually learns

and builds a knowledge base, using only the algorithms it is programmed to implement and observation of the POP mail processes that occur around it.

For example, when a first POP check for an e-mail account is received by the proxy server (assuming it is starting from a no memory state), the proxy server permits the POP check to flow through to the mail server and starts to build a list. The proxy server determines the state of the mailbox and then keeps track of the state information. As this process repeats for different users, the proxy server builds up a table of users and the state of their respective mailboxes. This self-teaching aspect of soft state operation eliminates the need for expensive state back-up resources to store state information for later retrieval in the event of failure of the proxy server. A dead proxy server may simply be replaced by a similar machine what will teach itself what it needs to know.

The network traffic management goals of the above-described attenuation process may also be accomplished by delay of the POP checks. Instead of using the proxy server to report no new mail as disclosed above, the proxy server inserts a delay into the processing of the POP commands. As previously disclosed the first pop check results in the user being entered into a delay table. The user remains in the table for a time = N, where N is the desired allowable period between POP sessions. After time N the user will be dropped from the delay table.

This delay is preferably a variable that changes with client POP habits, or optionally the delay is a fixed value. Depending on the total amount of delay desired, this delay is inserted for a single POP command or for multiple of the POP session commands. The effect of this delay would be to increase the time that it takes for a POP session to complete.

1 While the delayed session is ongoing most email clients will not initiate a new
2 session until the old session has been completed. If a new session is initiated, the protocol
3 lock flag has been placed on the mailbox and an error will be sent -ERR Mailbox already
4 open, for which the client will realize the last session is still open.

5 This delay should be less than the timeout setting in the POP3 client to avoid
6 having the client report a timeout error. To allow for low settings of client timeout a small
7 amount of delay can be added to multiple steps in the POP command. As mentioned
8 above, the amount of delay can be set to a variable based on a user's POP check habits.
9 That is, the amount of delay is programmable based on the frequency of POP checks. If
10 the user is checking more frequently than desired for optimal network loading, the amount
11 of delay is increased to keep the client from creating (or at least contributing to)
12 overwhelming load. The delay is gradually decreased when the client reduces the
13 frequencies of the POP checks. The quick check logic discussed above with regard to
14 attenuation is also applicable to implementation of a POP delay scheme.

15 Referring to **Fig. 8**, a logical implementation for a subset of the signaling
16 transactions that take place between a client, a proxy server, and a mail server is
17 illustrated. The signal transactions shown represent the case where the mail client is being
18 delayed (i.e., is in the delay table).

19 E-mail traffic load varies with time. There is little that can be done to control
20 when e-mail messages are transmitted to a POP mail server. However, there is some
21 opportunity to manipulate the traffic patterns for how and when e-mail is distributed from
22 the mail server to the intended recipients. This may be exploited to minimize peak traffic
23 loads to the extent that the load is caused by retrieval of e-mail messages.

1 According to the cache aspect of the invention, a user's e-mail is *cached at the*
2 proxy server nearest to his presumed location. This decentralizes the e-mail storage away
3 from the mail server and spreads it out over the network at the various proxy servers. This
4 cache action is preferably done when there is a lull in network traffic (e.g., at night). This
5 also has the effect of decentralizing the bandwidth demand on the overall network since
6 the e-mail messages have a shorter distance to travel when retrieved by the user from the
7 cache location at the proxy server.

8 By this cache action, the user's mail is moved out to the edges of the network
9 ahead of when the user will be seeking to retrieve it. In a sense, the mail messages are
10 pushed to the user, at least part of the way, to a proxy server near where it is presumed that
11 the user will connect to the network when he seeks to retrieve his e-mail. This
12 presumption will not always be accurate, however, since users are free to connect to the
13 network at geographically diverse points (e.g., when they are traveling). More often than
14 not, though, the presumption should be accurate.

15 One algorithm for choosing which proxy server to push a given user's e-mail to is
16 to always assume that the same proxy server (entered in the user's profile as their "home"
17 proxy server) will be appropriate. This algorithm does not adapt to a user's changing
18 position. This algorithm relies only upon a default user profile as a reference, not a
19 dynamic state table.

20 Another algorithm for choosing which proxy server to push a given user's e-mail
21 to is to select the proxy server that is the most proximate to the last known point on the
22 network where the user accessed the network. This algorithm is dynamic and adapts to a
23 user's changing geographic position. However, this algorithm is not completely consistent
24 with a soft state approach where there is no reliance upon keeping a memory of previous

1 served the locally cached copies of the messages. When the user deletes a message, that
2 message is deleted from both servers virtually simultaneously (allowing for transmission
3 delay across the network). However, if there is a difference between the UIDs of
4 messages residing on the two servers, the locally cached messages are thrown away and
5 the messages stored at the mail server are retrieved for the user. In this manner, any
6 confusion or conflict is avoided.

7 Referring to **Fig. 1**, a network diagram illustrates how proxy handling of e-mail
8 may be implemented according to an embodiment of the present invention. An e-mail
9 message originates from an originator client **20**, addressed to the e-mail account of an
10 intended recipient client **40**. The e-mail message travels from the originator **20**, via a
11 network **10**, to an e-mail server **30**. The process by which the e-mail message travels from
12 the mail server **30** to the recipient **40** follows one of two general scenarios.

13 In the event that the recipient **40** is not operating their e-mail client software
14 contemporaneously with the receipt of the e-mail message by the mail server **30**, the e-
15 mail message may be cached. When traffic load on the network ebbs, the e-mail message
16 is cached at a proxy server **50**, which is nominally local to the recipient **40**. When the
17 recipient **40** subsequently initiates their e-mail client software, the recipient transmits a
18 POP check (via the network **10**) that is intercepted by the proxy server **50**. In reply to the
19 POP check, the proxy server **50** transmits to the recipient **40** the cached e-mail message
20 and informs the e-mail server **30** that that message may be deleted from the e-mail server's
21 memory.

22 In the event that the recipient **40** is operating its e-mail client software
23 contemporaneously with the receipt of the e-mail message by the mail server **30**, the e-
24 mail message is retrieved from the e-mail server **30** subject to any POP delay activity that

WHAT IS CLAIMED IS:

1 1. A method of moderating traffic load on network servers in a network where
2 electronic mail is retained for retrieval from at least one mail server, the method
3 comprising:

4 permitting a mail request for a mail client to pass through a proxy server to the
5 mail server; and

6 delaying subsequent mail requests for the mail client at the proxy server until a
7 predetermined condition has been satisfied.

1 2. The method of claim 1, wherein the predetermined condition is a predetermined
2 period of time.

1 3. The method of claim 2, wherein the predetermined period of time is
2 dynamically determined based on the amount of traffic load on the network.

1 4. The method of claim 2, wherein the predetermined period of time is
2 dynamically determined based on past behavior of the mail client.

1 5. The method of claim 4, further comprising:
2 transmitting a message to the mail client providing information that the mail
3 client's mail requests will be delayed as a result of the mail client's past behavior.

1 6. The method of claim 5, wherein transmitting a message comprises providing
2 instructions on how to modify mail client software.

6 applying remedial handling of subsequent mail requests for the mail client at the
7 proxy server until a predetermined condition has been satisfied, the remedial handling
8 being selected from the group consisting of: delaying and attenuating; and
9 transmitting a message to the mail client providing information that the mail
10 client's mail requests will be delayed as a result of the mail client's past behavior
11 wherein the predetermined condition is a predetermined period of time that is
12 dynamically determined based on past behavior of the mail client.

ABSTRACT OF THE DISCLOSURE

1 Traffic handling load on network servers is moderated by delaying POP checks at
2 proxy servers located across the network. Delay of POP check processing is accomplished
3 by intercepting each POP check packet at a proxy server that is nominally local to where
4 the user is located. The proxy server permits a given user's initial POP check to proceed
5 on through the network to the mail server. Thereafter, though, the proxy server only
6 permits that user's received POP checks to proceed onward only after interjecting a delay
7 in the POP process. Optionally, automatic messages are sent on a daily basis to a user
8 who performs abusively rapid POP checks to inform them that their POP checks are being
9 delayed and/or attenuated and educating them how to modify the configuration of their
10 mail client software.

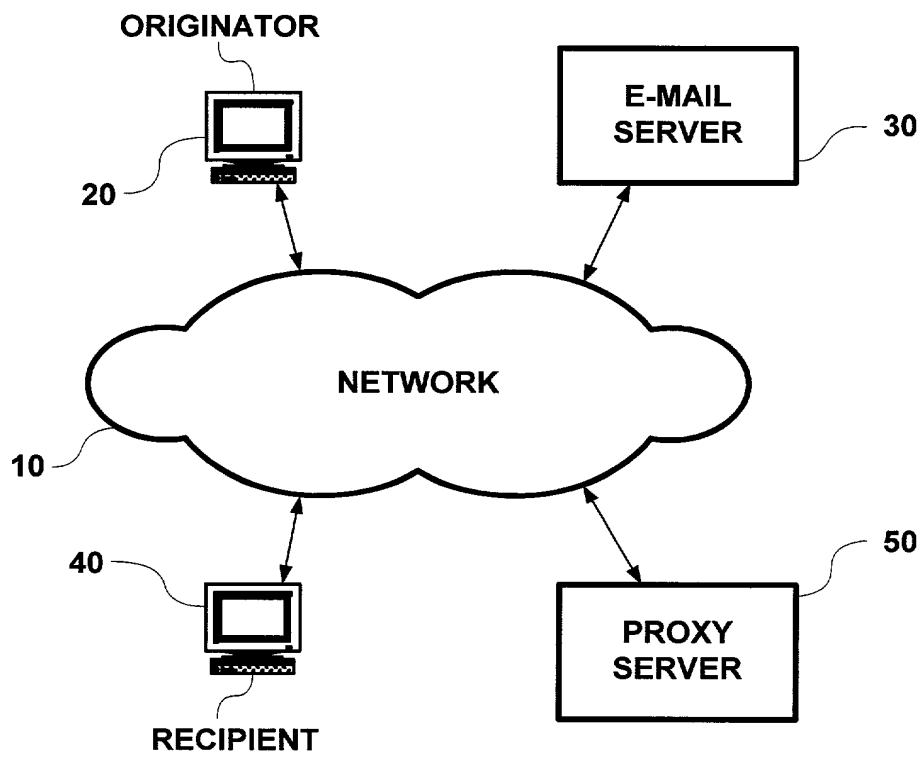


FIG. 1

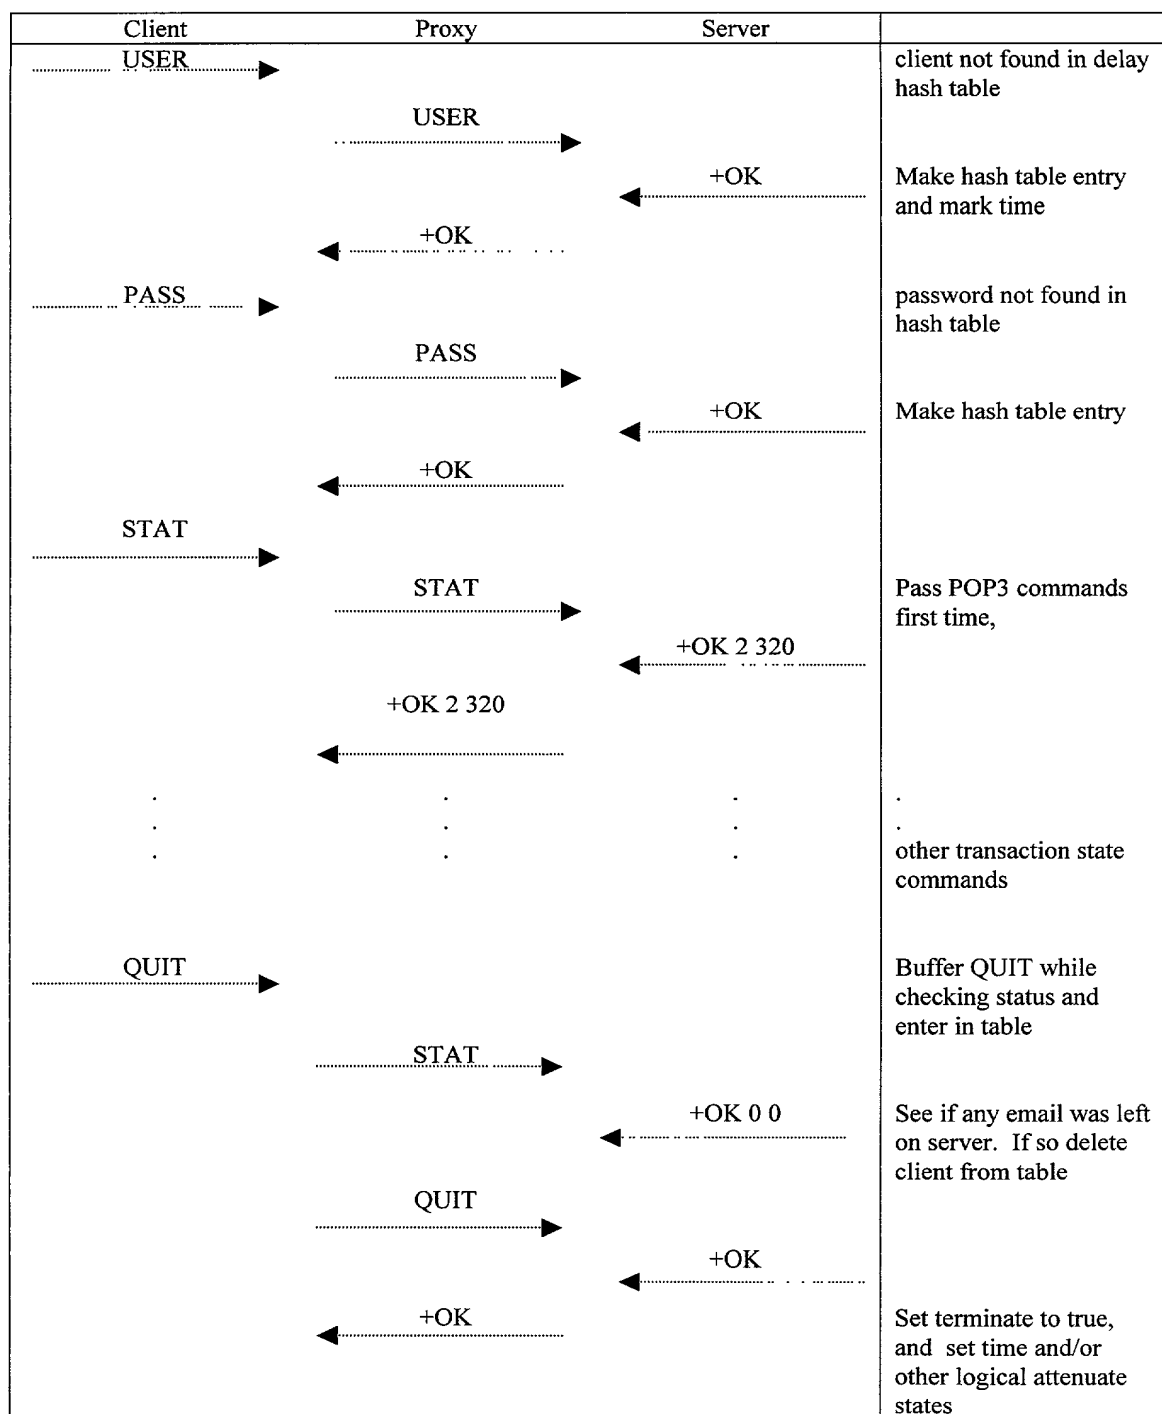


FIG. 2

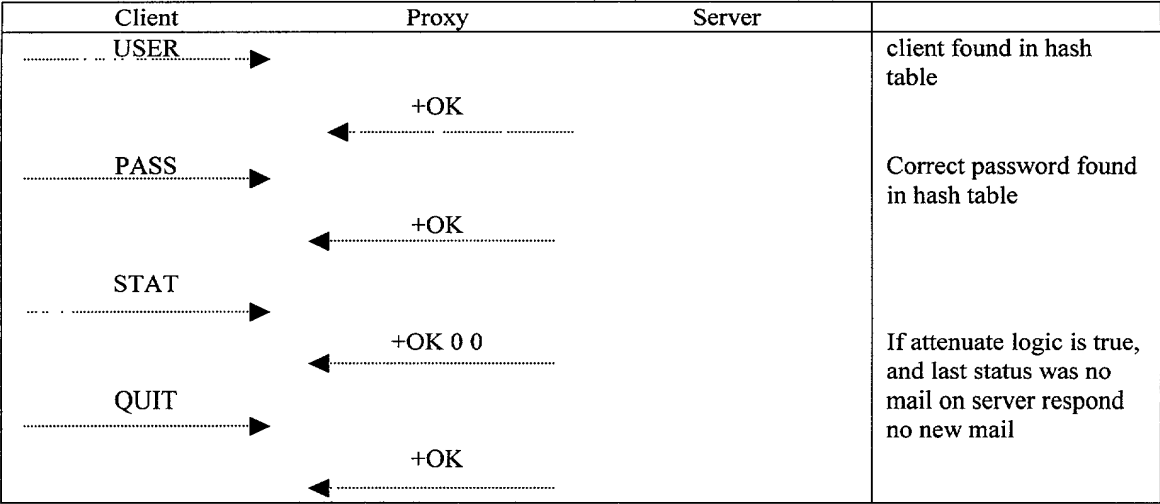


FIG. 3

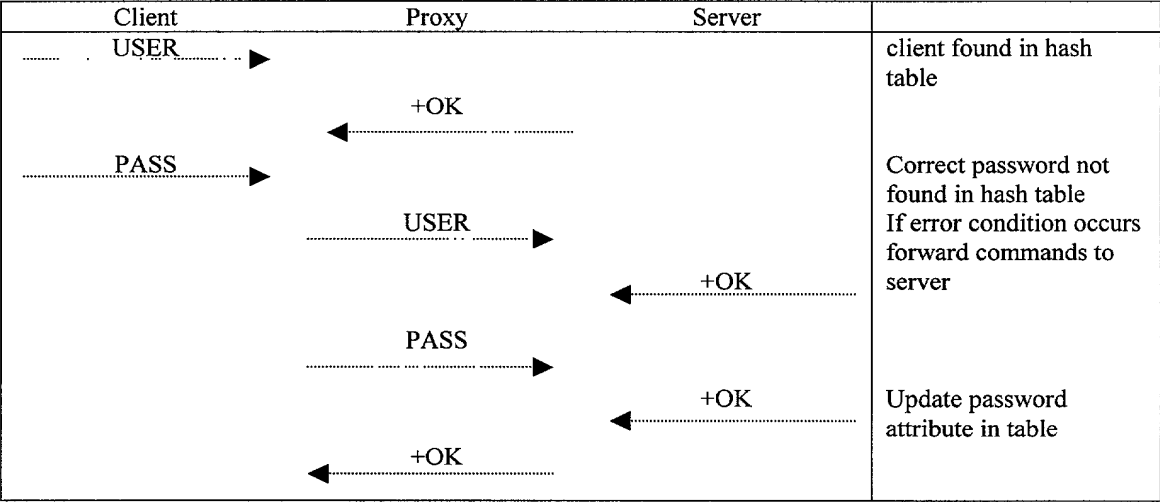


FIG. 4

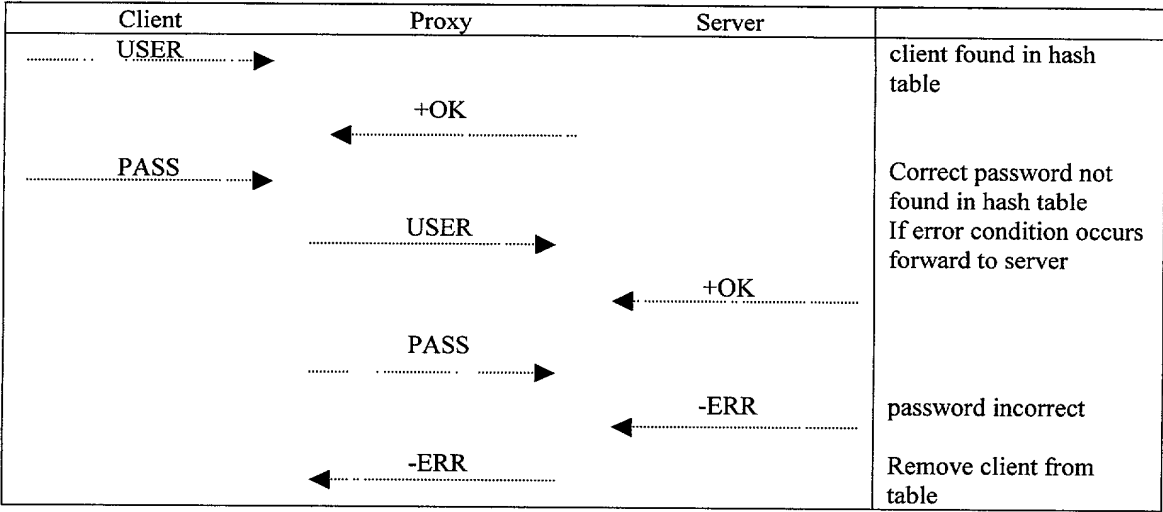


FIG. 5

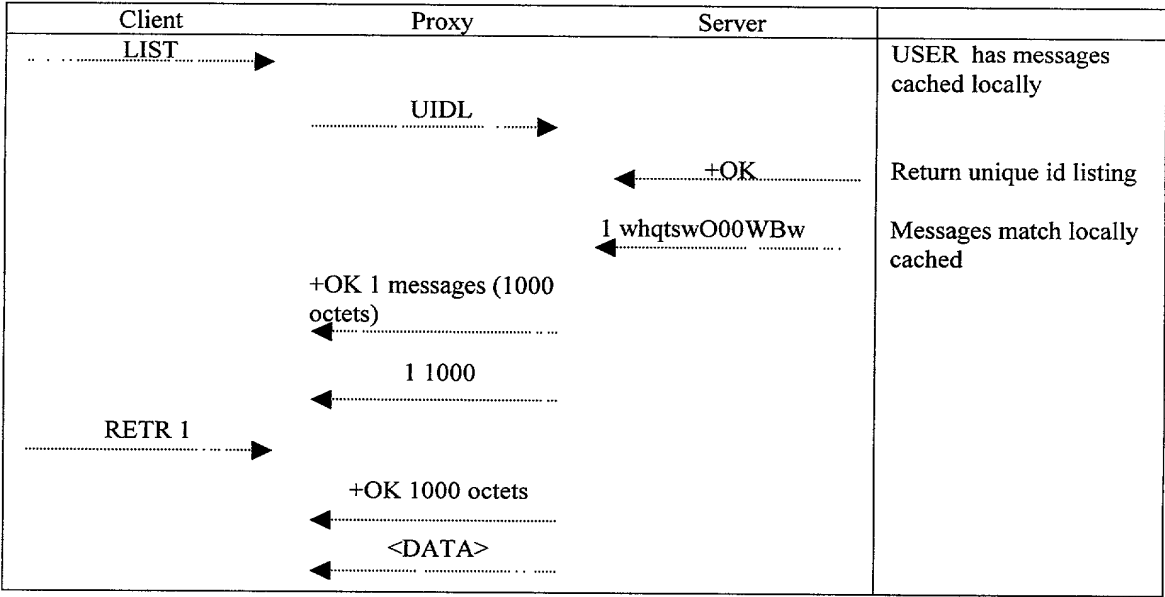


FIG. 6

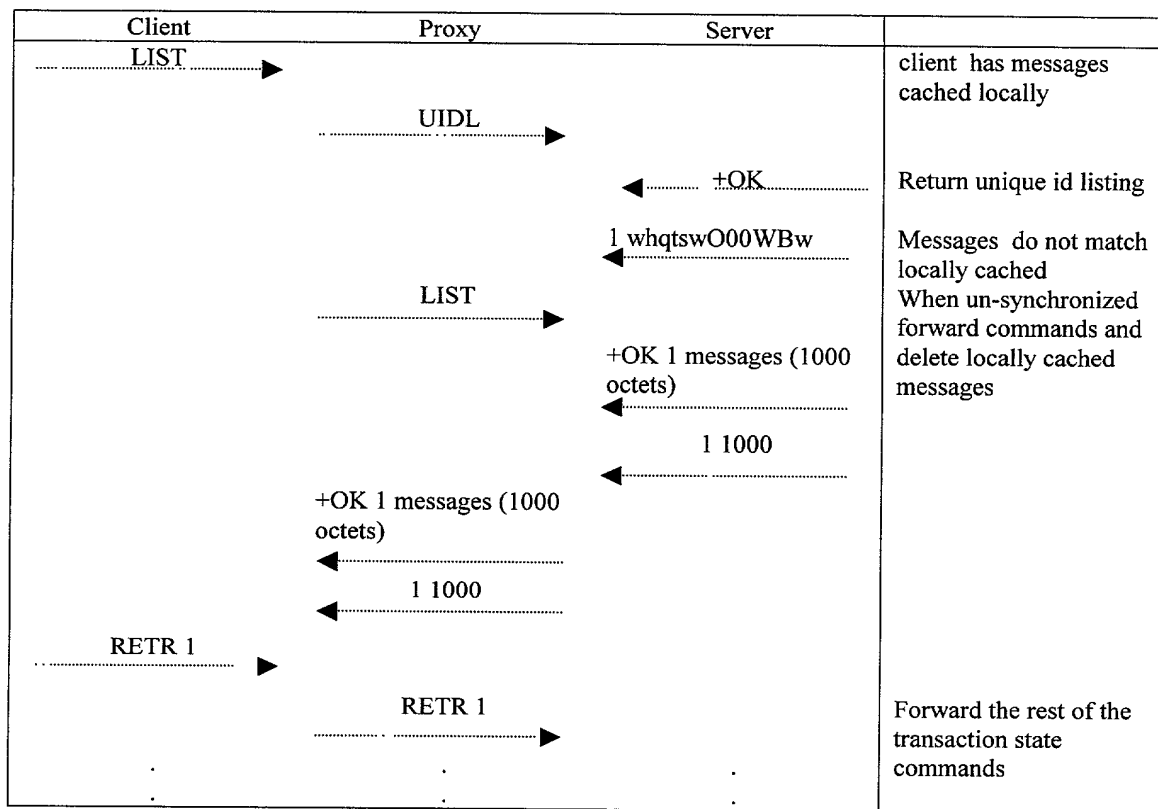


FIG. 7

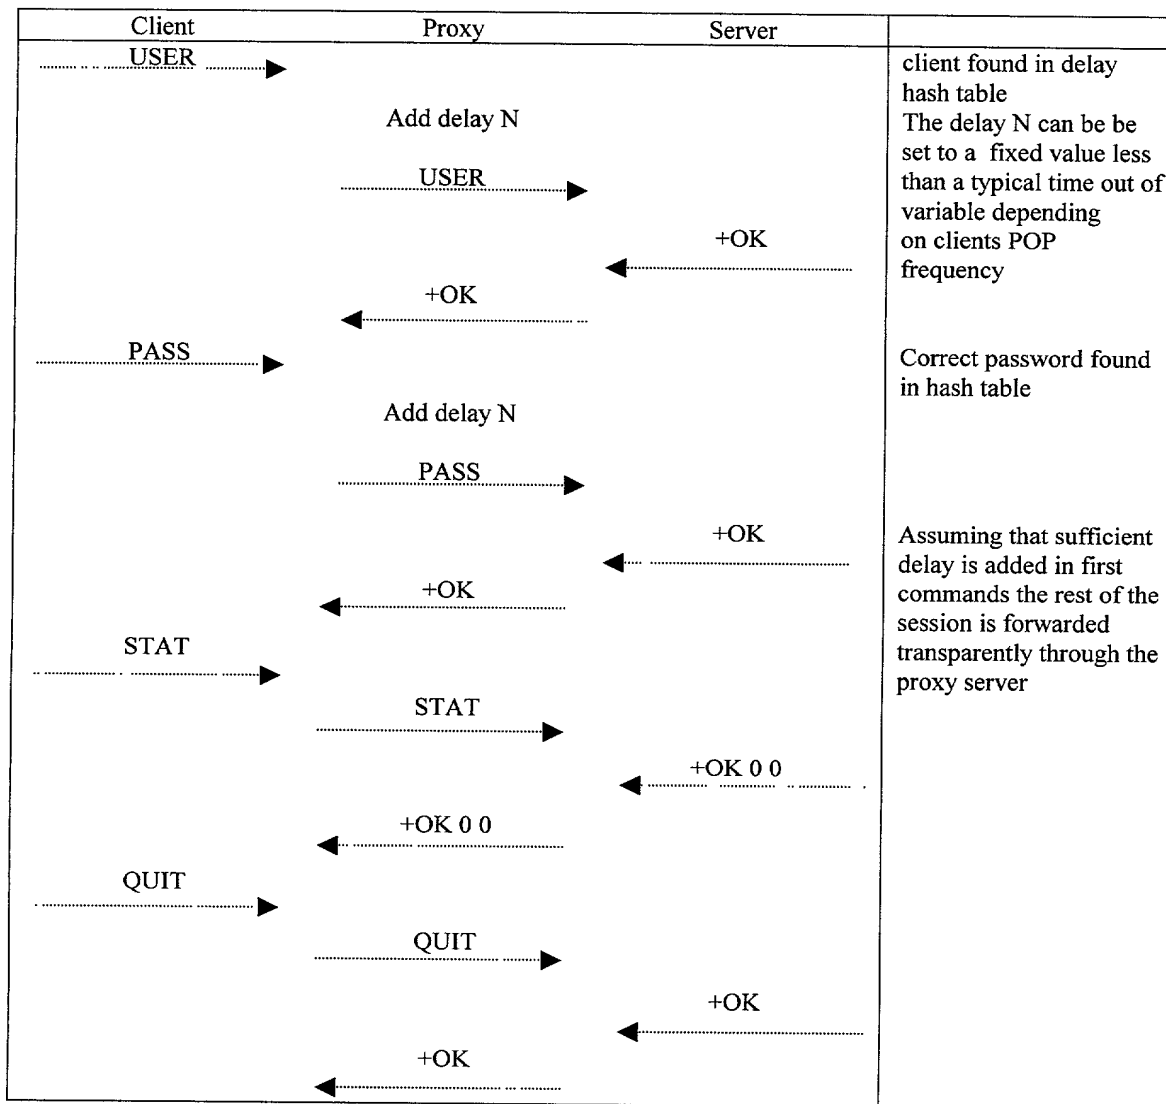


FIG. 8

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of Jeff Wasilko

Serial No.: Not Yet Assigned

Group Art Unit:

Filed: HEREWITH

Examiner:

**FOR: ATTENUATION, DELAY, QUEUING, AND MESSAGE CACHEING PROCESSES
FOR USE IN E-MAIL PROTOCOLS IN ORDER TO REDUCE NETWORK SERVER
LOADING**

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As below inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, sole and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **ATTENUATION, DELAY, QUEUING, AND MESSAGE CACHEING PROCESSES FOR USE IN E-MAIL PROTOCOLS IN ORDER TO REDUCE NETWORK SERVER LOADING**, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby appoint the following attorney(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Jon L. Roberts
Registration No. 31,293
John K. Abokhair, Esq.
Registration No. 30,537
Kevin L. Pontius
Registration No. 37,512
Christopher B. Kilner
Registration No. 45,381
Roberts Abokhair & Mardula, L.L.C.
11800 Sunrise Valley Drive
Suite 1000
Reston, Virginia 20191-5302
(703) 391-2900

002440: 00000000

